

# Carbon Filter O&M: Models CF3, CF4

## Maintenance Instructions

### Step 1: Remove Cap

Pull the top cap off of the carbon filter.

### Step 2: Discard Sock

Take out the carbon-filled “sock” and dispose of it properly.

### Step 3: Insert Refill Sock

Insert a carbon-refill “sock” into the filter.

### Step 4: Reassemble and Reinstall Filter


**Step 4a:** Replace the top cap on the carbon filter.

- Press the cap down firmly to seat it on the filter.

**Step 4b:** Slide the carbon filter onto the roof vent.

**Step 4c:** Rotate the carbon filter 1/4 turn on the roof vent.

- Do not glue the carbon filter to the roof vent!

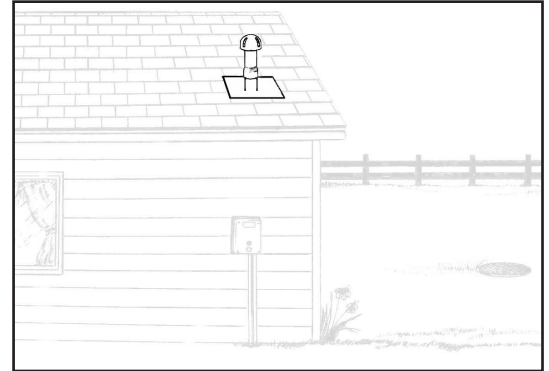

Carbon filters are often installed on roof vents to control odors. Use proper safety equipment and practices when working on roofs.

