


# Fiberglass and ASA Caps


## Applications

To cap pipes or risers, Orenco's fiberglass and acrylic styrene acrylonitrile (ASA) caps are used as access covers for valve boxes and tank hatches. These caps are rated for pedestrian traffic only.

- FL8 caps fit 8in diameter IPS pipe.
- FL12 caps fit 12in diameter PIP pipe.
- FL12GTU caps fit 12in diameter ultra rib style pipe.

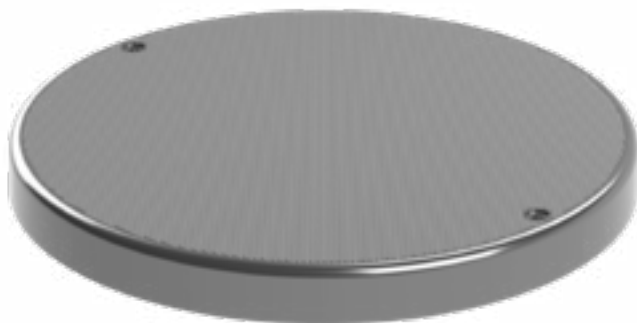

FL12GTU cap

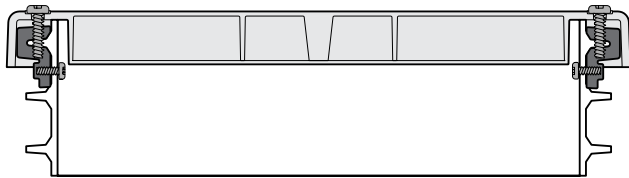

FL12GTU cap installed with bolt catches and cap screws  
(cross-sectional view)


## General

Molded using fiberglass or ASA, these caps are green and come with a nonskid surface and a gasket. FL12GTU caps come with two cap screws and bolt catches for ultra rib style pipe.

## Standard Models

FL8G, FL12G, FL12GTU

## Product Code Diagram

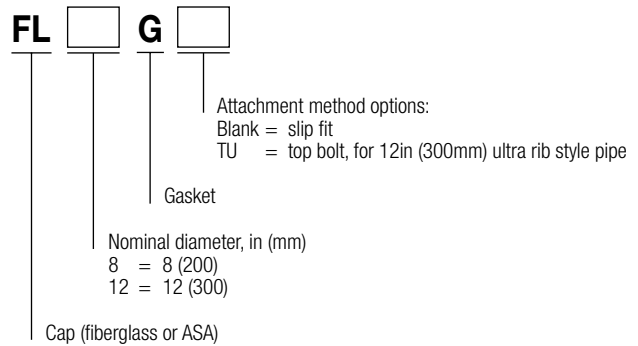

*Not all product code configurations may be available as standard products.*

## Materials of Construction

FL8, FL12GTU	ASA
FL12	Fiberglass
Gasket	EPDM
Mounting hardware	Stainless steel
Bolt catches (FL12GTU)	Fiber-reinforced polymer

## Specifications

Dimensions, in (mm)	FL8G	FL12G	FL12GTU
O.D.	9 (229)	12.5 (318)	14 (356)
I.D.	8.63 (219)	12.25 (311)	13.62 (346)
Top thickness	0.19 (4.8)	0.19 (4.8)	0.19 (4.8)
Lip thickness	0.19 (4.8)	0.13 (3.3)	0.19 (4.8)