


Insulation Plugs

Applications

In cold climates, Orenco® insulation plugs are used to protect, from freezing, the components of the septic system that are contained in the riser.

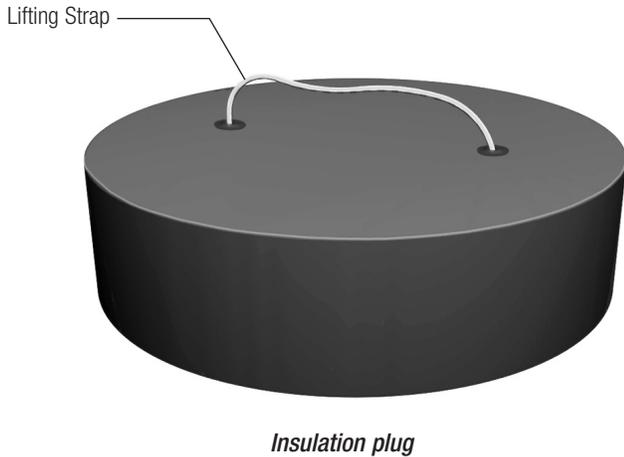


General

Orenco's insulation plugs are sized to fit inside 24- and 30-inch (600- and 750-mm) Orenco FRP and ribbed PVC risers. The insulation has an R-value of 30 and is contained within a watertight shell for longevity. The plug sits loosely in the riser, usually resting on the splice box. Plugs can be stacked for additional insulation value. A polyethylene strap enables the plug to be removed easily.

Standard Models

INS246, INS306

Product Code Diagram



Materials of Construction

Insulation	Urethane foam fill
Shell	Rubberized coating
Strap	Polyethylene

Specifications

Model	IN246	IN306
Diameter, in. (mm)	22 ¹⁵ / ₁₆ (583)	29 ³ / ₈ (746)
Height, in. (mm)	6 ³ / ₈ (162)	6 ³ / ₈ (162)
Insulation R-Value (RSI)	30 (5.3)	30 (5.3)