

Fiberglass Access Risers

Applications

Orenco® Fiberglass Access Risers are designed to provide access to septic tank openings, as well as watertight connections between the tank, riser, and lid. They can be cast into the tops of concrete tanks or bonded to a fiberglass tank. They can also be used as valve enclosures.

The RF24 and RF30 fiberglass access risers are designed for use with Orenco's FLD access lid.

General

Orenco Fiberglass Access Risers are constructed of filament-wound fiberglass to be lightweight, corrosion resistant, and extremely strong. Risers are available in 24- and 30-in. (600- and 750-mm) diameters, with lengths available in 3-in. (75-mm) increments. They have four bolt catches to secure access riser lids.




Orenco® Fiberglass Access Risers are available in 24- and 30-in. (600- and 750-mm) diameters.

Standard Models

RF24XX, RF30XX

Product Code Diagram

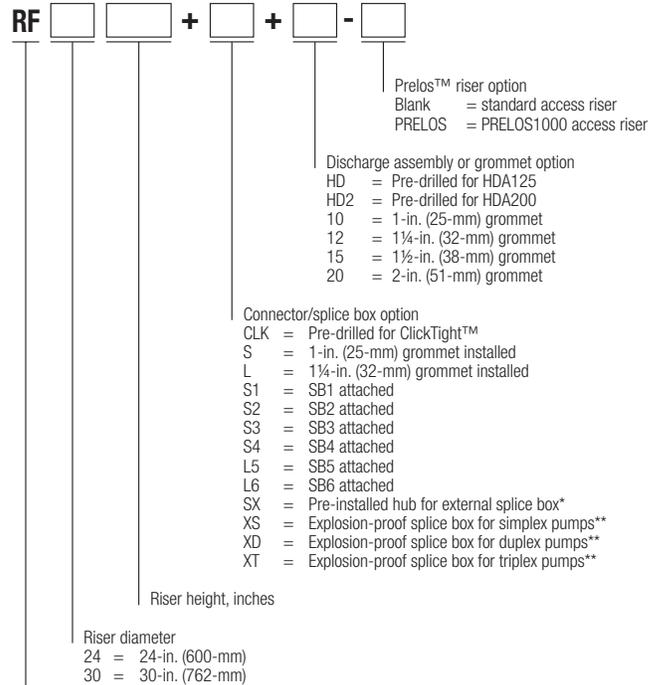

Orenco® fiberglass access riser

* Minimum riser height 18-in. (457-mm)
** Used in Class I Division 1 environments

Materials of Construction

Access riser	Fiberglass-reinforced polyester
Bolt catches	Glass-filled nylon
Hardware	Stainless steel

Specifications

Dimensions, nominal	RF24XX	RF30XX
Riser O.D., in. (mm)	24 (610)	30 (762)
Riser I.D., in. (mm)	23.5 (597)	29.5 (749)
Wall thickness, in. (mm)	0.1875 (5)	0.25 (6)
Weight, lb/ft (kg/m)	11 (279)	18 (457)