


Fiberglass Tank Adapter

Applications


Orenco's 30-in. (762-mm) molded fiberglass tank adapter is used to provide a structural, watertight bond when installing a riser over an Orenco FRP tank opening. This tank adapter is compatible with 30-in. Perma-Loc and Ultra-Rib pipe. It is designed to be epoxied onto an Orenco FRP tank. It can also be epoxied onto a PRTA24 tank adapter, allowing the PRTA24 to accept a 30-in. (762-mm) riser.



FRTA30-FRP

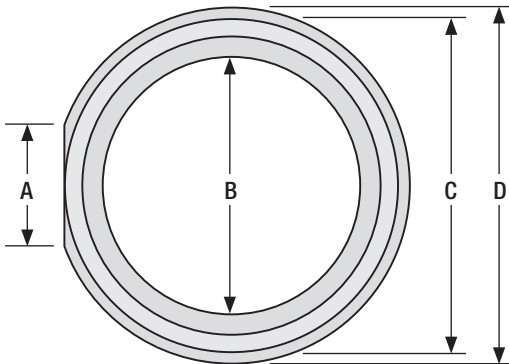

FRTA30-FRP, top view

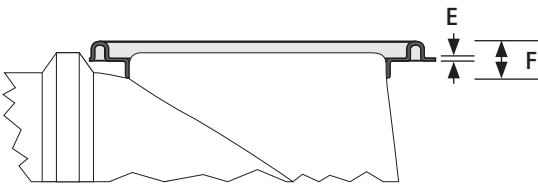

FRTA30-FRP, cross-sectional side view, as installed

General

To specify Orenco molded fiberglass tank adapters for your installation, require the following:

- Ability to create a structural, watertight joint
- Rugged, durable, corrosion-resistant construction
- For use on fiberglass (FRP) tanks

Standard Model

FRTA30-FRP

Material of Construction

Fiberglass-reinforced polyester

Specifications

A, in. (mm)	12 (305)
B, in. (mm)	23½ (597)
C, in. (mm)	29⅝ (746)
D, in. (mm)	31⅞ (810)
E, in. (mm)*	¼ (6)
F, in. (mm)	2¼ (70)

* Adapter thickness is nominal