


OR-SNAPPAR-2400 Tank Adapter

Applications

Orenco's OR-SNAPPAR-2400 Tank Adapter is used to help create watertight joints between an Infiltrator™ molded polypropylene tank and a nominal 24in (600mm) diameter tank access riser.



Orenco's OR-SNAPPAR-2400 helps create watertight joints between Infiltrator tanks and 24in (600mm) access risers

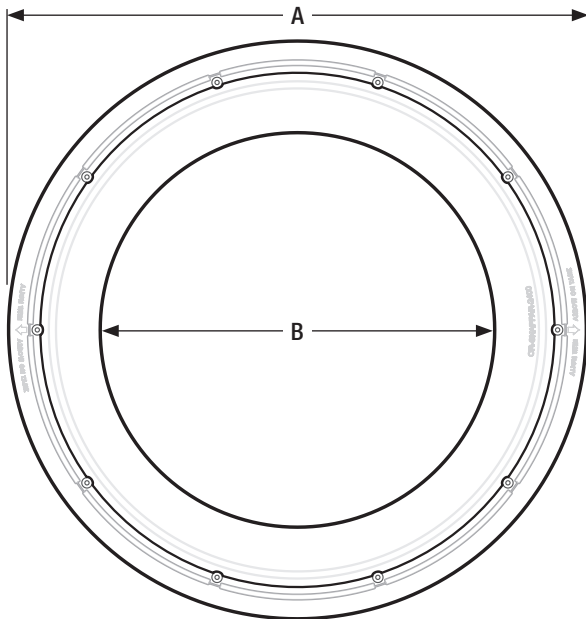

OR-SNAPPAR-2400, top view

General

The OR-SNAPPAR-2400 Tank Adapter provides a wide, ABS interface for installing an access riser with a nominal 24in (600mm) diameter. It is designed to create a watertight seal between the tank, adapter, and riser when correctly installed. The horizontal flange is designed to support a hanging pump vault.

The OR-SNAPPAR-2400 is secured to an infiltrator tank with ADH200 adhesive and an SSS-1410HEX kit, consisting of 10 #14 × 2in stainless steel hex anchor screws.

For more information on ADH200 and other adhesives, see [Adhesives and Dispensers for Orenco Products, NTD-GOP-ADH-1](#).

Standard Models

OR-SNAPPAR-2400


SSS-1410HEX

Materials of Construction

Adapter	ABS
Anchor screws	Stainless steel

Specifications

Dimensions, in (mm)	
A	27.82 (707)
B	19 (483)
C	23.36 (593)
D	3.57 (91)

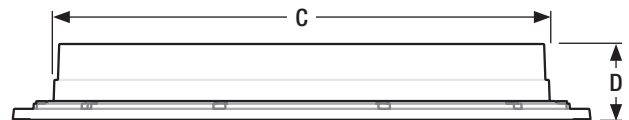

OR-SNAPPAR-2400, side view