

Infiltrator ProSTEP™ Tanks

Applications

Infiltrator's ProSTEP PS-1060 and PS-1530 Tanks are strong, light-weight, and durable tanks optimized for liquid-only sewer applications. They are ideally suited for Orenco's Biotube® ProSTEP Pump Packages which are specifically designed to work with Infiltrator ProSTEP tanks.


General

- Advanced molded construction featuring deep corrugations that maximize strength while maintaining a lightweight profile
- Built-in lifting lugs and hand ropes allow for easy delivery and handling
- Structurally reinforced access ports eliminate distortion during installation and pump-outs
- Reinforced structural ribbing and fiberglass supports offer additional strength
- Can be installed with 6in to 48in (152mm to 1219mm) of cover
- Designed for use with Orenco adapters, risers, and lids


Standard Models

PS1060P/2-14/00-P25, PS1530P-2M/2-14/00-P25


Product Code Diagram

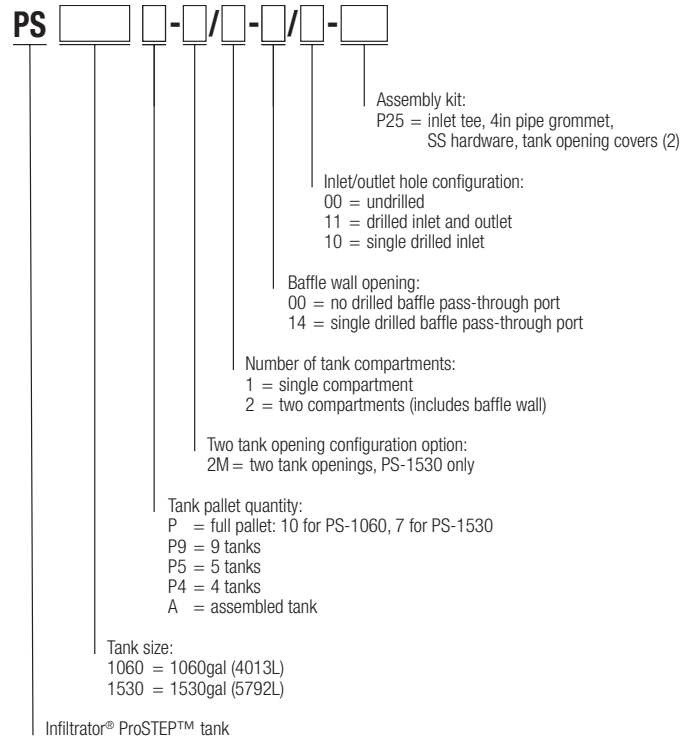

Infiltrator ProSTEP PS-1060 tank

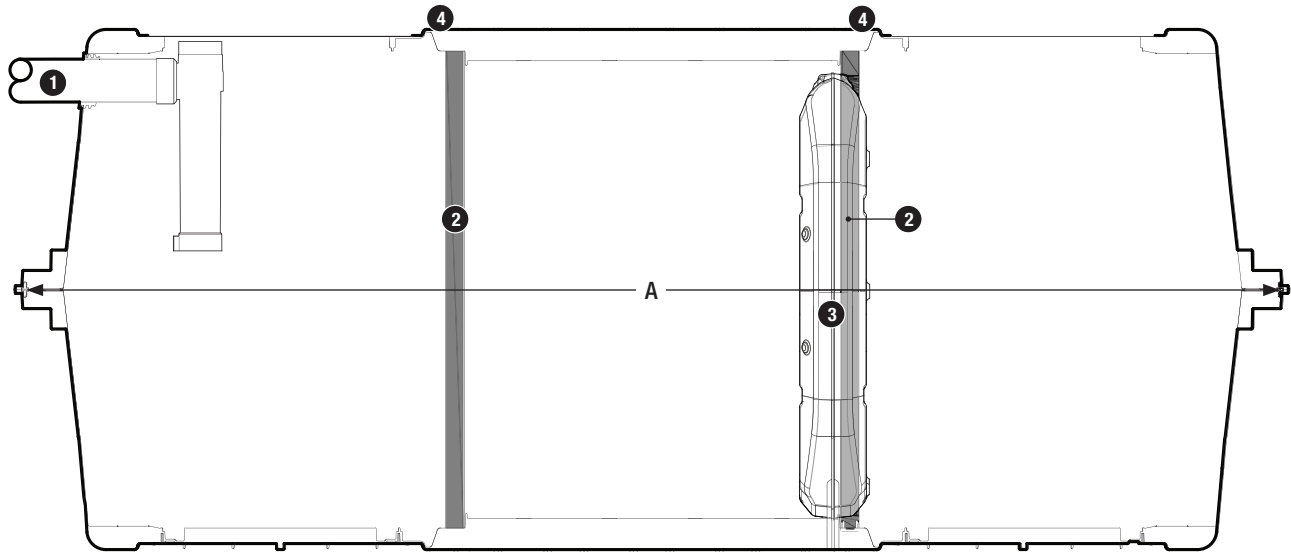

Infiltrator PS-1060 tank, side sectional view,

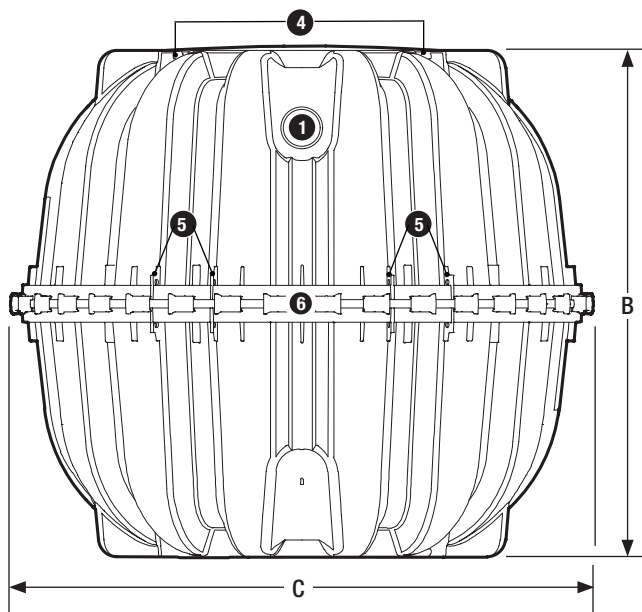

Infiltrator PS-1060 tank, end view

Materials of Construction

Tank body	Polypropylene
Supports	Fiber-reinforced polymer (FRP)
Hardware	Stainless steel
Inlet Tee	PVC

Specifications

	PS-1060	PS-1530
Working capacity, gal (L)	1111 (4206)	1537 (5818)
Weight, lbs (kg)	331 (150)	518 (235)
Fiberglass supports	2	4

Dimensions, in (mm)

A Tank length	134.2 (3409)	176 (4470)
B Tank height	54.5 (1384)	54.5 (1384)
C Tank width	61.7 (1567)	62 (1575)

Components

1. Inlet
2. Support posts
3. Solids-tight baffle wall
4. Top lift attachment points (4 total)
5. End lift attachment points (4 total)
6. Mid-seam with blue clips