

Sentinel™ Liquid Level Alarms

Applications

Orenco's Sentinel Liquid Level Alarms are stand-alone alarm units used to monitor liquid levels in onsite septic systems.



115VAC Sentinel liquid level alarm


General

Orenco Sentinel Liquid Level Alarms are specifically engineered for stand-alone monitoring of liquid levels in onsite septic treatment systems. They are designed for use with signal-rated float switches. The Sentinel I uses a 115VAC power supply; the Sentinel II and II-W run on 9VDC batteries. Sentinel I and II alarms are suitable for indoor use; Sentinel II-W alarms are suitable for indoor and outdoor use.

Standard Models

AMSENTI, AMSENTII, AMSENTII-W

Product Code Diagram

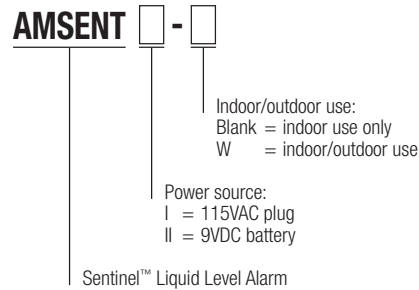

Not all product code configurations may be available as standard products.

Specifications

Model	AMSENTI	AMSENTII	AMSENTII-W
Enclosure dimensions, in (mm)	4×4×2 (102×102×51)	4×4×2 (102×102×51)	4×4×2 (102×102×51)
Enclosure rating	UL Type 1	UL Type 1	UL Type 4X
Power source	115VAC	9VDC	9VDC
Test switch	SPDT	SPDT	SPDT
Visual alarm	Red LED	Red LED	Red LED
Audio alarm	85dB at 12in (305mm)	85dB at 12in (305mm)	85dB at 24in (610mm)
Audio silence feature	Switch	Switch	Switch
Use	Indoor only	Indoor only	Indoor/outdoor