

FRP Access Risers

Applications

Orenco FRP (fiberglass-reinforced polymer) Access Risers are designed to provide access to septic tank openings, as well as watertight connections between the tank, riser, and lid. They can be cast into the tops of concrete tanks or bonded to a fiberglass or dicyclopentadiene (DCPD) tank. Orenco FRP Access Risers can also be used as valve enclosures.

The RF24 and RF30 FRP access risers are designed for use with Orenco's FLD access lid.

General

Orenco FRP Access Risers are constructed of filament-wound fiberglass to be lightweight, corrosion resistant, and extremely strong. Risers are available in 24in and 30in (600mm and 750mm) diameters, with heights available in 3in (75mm) increments. They have four bolt catches to secure access riser lids and are compatible with Orenco tank adapters. See <https://www.orencowater.com/products/gravity-pump-products/access-risers/riser-tank-adapters> for information on adapters.



Orenco FRP Access Risers are available in 24in and 30in (600mm and 750mm) diameters.


Riser Wall Thickness

Length	RF24XX	RF30XX
Up to 8ft (2.4m)	0.1875in (5mm)	0.25in (6mm)
8ft (2.4m) - 12ft (3.7m)	0.3125in (8mm)	0.3125in (8mm)
Over 12ft	Custom	Custom

Standard Models

RF24XX, RF30XX

Product Code Diagram

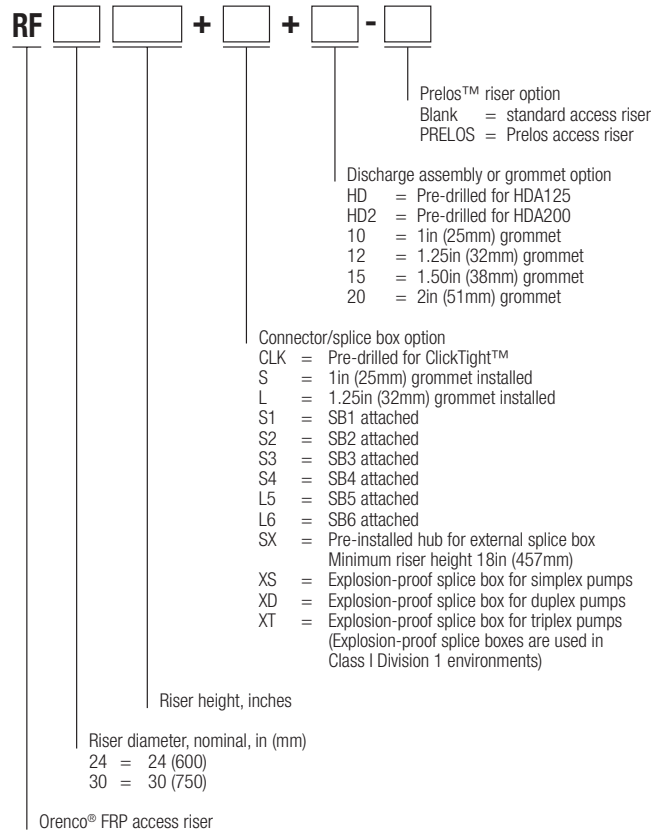

Materials of Construction

Access riser	Fiberglass-reinforced polymer
Bolt catches	Glass-filled nylon
Hardware	Stainless steel

Specifications

Model	RFP24	RFP30
Inside diameter, in (mm)	23.5 (597)	29.5 (749)
Outside diameter, in (mm)	24 (600)	30 (750)
Weight, lb/ft (kg/m)	11 (16)	18 (27)