


Pipe Grommets

Applications

Orenco[®] Pipe Grommets are used to provide a seal to prevent the passage of liquids through pipe penetrations.

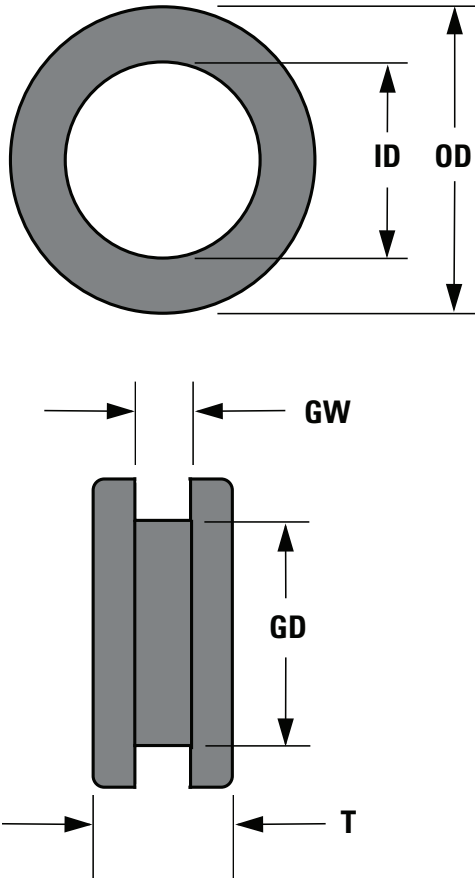


General

Orenco Pipe Grommets are constructed of corrosion-resistant rubber to provide long-lasting seals. Grommets conform to standard IPS sizes. Not all models conform exactly to the image shown.

Standard Models

G05L, G07L, G1L, G125L, G150L, G2L, G3L, G4L, G6L

Product Code Diagram

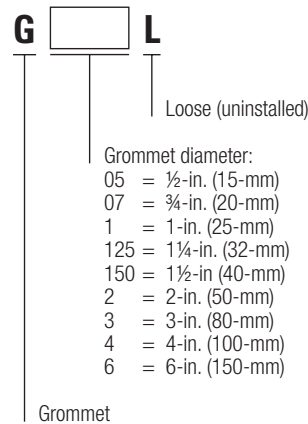

Material of Construction:

Grommet EPDM synthetic rubber in accordance with MIL-STD-417, 60 durometer.

Specifications

Model	G05L	G07L	G1L	G125L	G150L	G2L	G3L	G4L	G6L
OD, in. (mm)	1 ¼ (30)	1 ½ (38)	1 ⅞ (48)	2 ⅛ (54)	2 ½ (64)	3 ⅞ (98)	5 (127)	6 (152)	8 ⅛ (210)
ID, in. (mm)	¾ (19)	1 (25)	1 ¼ (30)	1 ½ (38)	1 ¾ (44)	2 ⅛ (54)	3 ¼ (83)	4 ⅜ (106)	6 ⅛ (170)
GD, in. (mm)	1 (25)	1 ¼ (30)	1 ⅝ (41)	1 ¾ (44)	2 ⅛ (54)	2 ⅞ (68)	3 ⅜ (97)	4 ⅝ (125)	7 ⅝ (193)
GW, in. (mm)	⅜ (5)	⅜ (5)	¼ (6)	¼ (6)	¼ (6)	⅝ (8)	⅝ (8)	¼ (6)	¼ (6)
T, in. (mm)	½ (13)	⅞ (11)	⅜ (14)	⅝ (8)	⅝ (8)	⅞ (24)	⅞ (24)	⅞ (22)	⅞ (21)
Holesaw size, in. (mm)	1 (25)	1 ¼ (30)	1 ⅝ (40)	1 ¾ (44)	2 ⅛ (54)	2 ¾ (70)	3 ⅞ (98)	5 (127)	7 (178)